


SPECIFICATIONS (RoHS Compliant)



Model Number: TNE3C
Part Number: 19020177A

Jan 24, 2013

Mechanical Drawing:

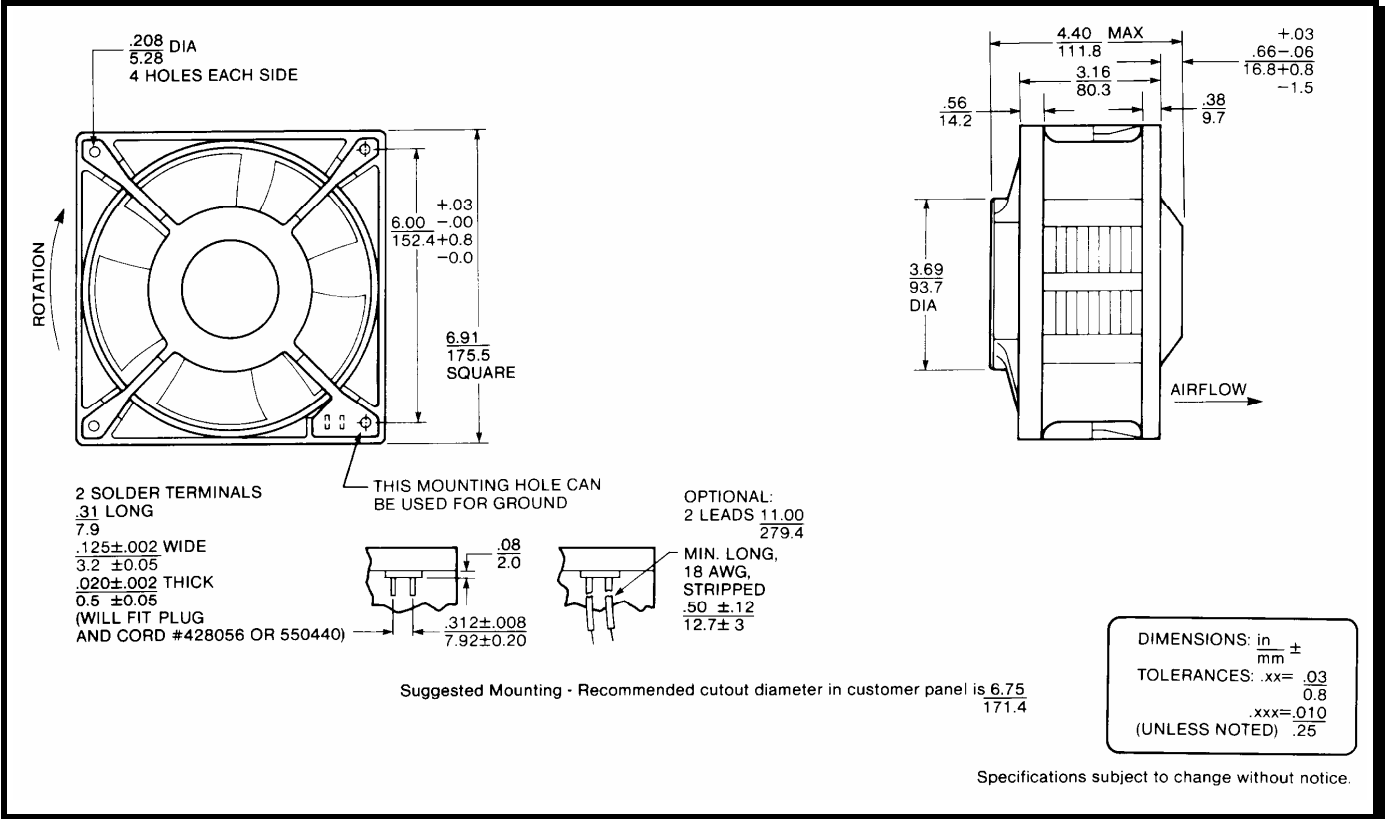

Motor:

Frequency	= 50 / 60 Hz
Nominal Voltage	= 220 / 230 VAC
Nominal Running Current	= 0.22 / 0.25 amps
Max. Locked Rotor Current	= 0.60 / 0.65 amps
Running Power	= 52 / 59 watts
Average Speed	= 2820 / 3350 RPM
Bearings	= Ball
Air Flow	= 280 / 340 CFM
Acoustic	= 61.6 / 65.4 dBA

Construction:

Venturi: Plastic, Black, UL 94V-0
 Propeller & Cover: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 25,000 hours at 40°C.

Additional Features:

Permanent Split Capacitor Motor
 Automatic Reset Thermal Protector
 Locked Rotor Protection
 Operating Temperature: -10°C to 70°C
 Storage Temperature: -40°C to 85°C

Termination:

12" Lead wires, AWG 18, UL 1015

Agency Approvals:

UL, CE